



GS2000 Grout System

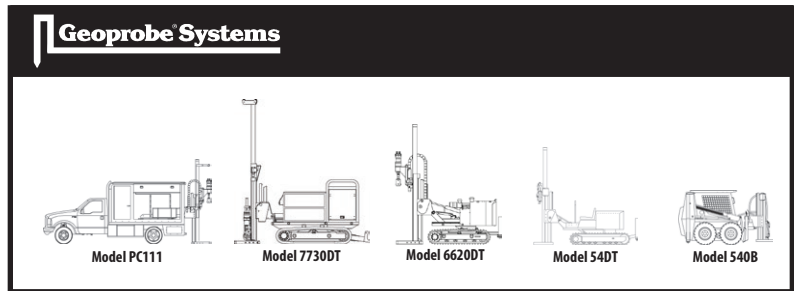
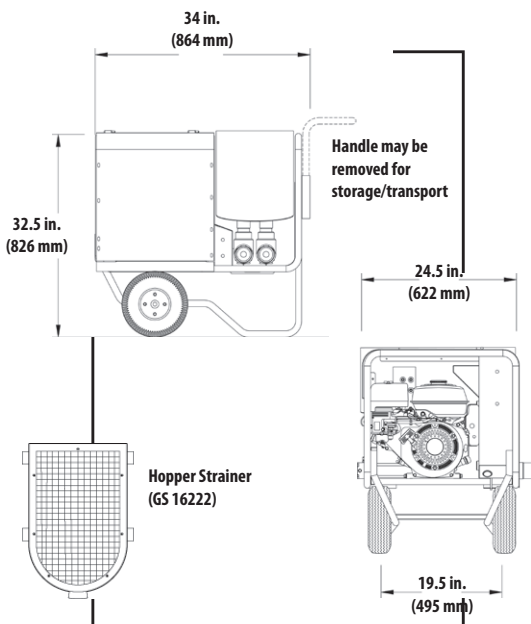
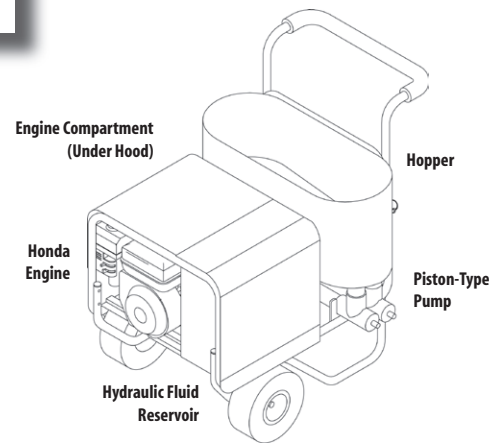



- Mobile ... Compact
- Designed for Injection of HRC® and HRC-X®
- Can Grout Probe Holes from the Bottom Up
- High Pressure enables Grouting by Small Tremie Tubes
- 9 hp Gasoline Engine
- Easy to Disassemble for Cleanup
- Dual Reciprocating-type Piston Pumps
- Few Replaceable (wear)
- Operates Independently of
- Use Without Carrier Vehicle Nearby
- Use With Multiple Geoprobe® Units
- Speed Control on Injection Machine



GS2000 Specifications

Weight (without grout).....	325 lb.....	147 kg
Hopper Capacity.....	12.75 gal.....	48.3 L
Hopper Capacity (3 in. freeboard)	9.5 gal.....	36 L
Pump	Hydraulically-driven piston pump	
Hydraulic Power Source.....	Fixed displacement gear pump	
Hydraulic Power Source Engine	Honda Model GX270	
Hydraulic Reservoir Capacity	6.75 gal	25.6 L
Engine Fuel Capacity	1.59 gal	6.0 L
Engine Horsepower.....	9.0 hp gasoline	
Pump Displacement.....	13 cu. in.	213 mL
Pump Pressure Rating	1850 psi	127 bar
Pump Flow Rate	0.9-3.6 gpm	3.4-13.6 Lpm

We have developed this E-specs document to allow you the ability to quickly compare the features and capabilities of various probe machines offered by Geoprobe Systems® ... the direct push innovators. Unit and tooling specifications are subject to change without notice. If you are interested in a specific Geoprobe® direct push system, please call us at **1-800-436-7762** for a formal, specialized quotation which includes all the details required for purchasing your Geoprobe® system.



601 N. Broadway • Salina, KS 67401
 1-800-436-7762
www.geoprobe.com